

## VESDA Sliding Windows HLI VHX-0200 & VHX-0210



The VESDA Sliding Windows High Level Interface (HLI) links your VESDAnet\* with PC software monitoring and configuring tools such as Xtralis VSM4 and VSC.

To configure and monitor devices on VESDAnet, your HLI must be connected to a VESDAnet socket card.

Direct Access to the Network

By interfacing with PC monitoring and configuring tools, the Sliding Windows HLI allows you to easily configure, manage and monitor your entire VESDA network.

Simple Configuration and Seamless Data Transfer

Your HLI is easily configured using your VSC or VSM4 software packages. The Sliding Windows model provides seamless data transfer from your VESDAnet to your PC.

Designed for Small or Large Networks

VESDA Sliding Windows HLIs are designed to suit your individual system design. The VHX-0210 is ideally suited for small networks of up to 40 devices, while the VHX-0200 is designed for large networks of up to 200 devices.

Modem Support

The VHX-0210 has modem (dial-in or dial out) capabilities allowing you full remote notification and interrogation functionality on networks of up to 40 devices.


## Features

- Direct access and monitoring of your entire VESDAnet system
  - Designed for small or large networks
  - VHX-0210 includes modem support for remote notification & interrogation
  - Seamless data transfer from your VESDAnet to your PC
  - Easily configured using Xtralis configuring and monitoring software packages
- Listings/Approvals  
VESDA HLIs are recommended for monitoring only. They are not approved for use as a primary reporting device.

**VESDA Sliding Windows High Level Interface**

	Number of devices connected to VESDAnet	Modem Support (Dial in/Dial out Feature)	Use with Xtralis software packages
VHX-0200 Sliding Windows	Up to 200	No	Yes
VHX-0210 Sliding Windows	Up to 40	Yes	Yes

**Dimensions**

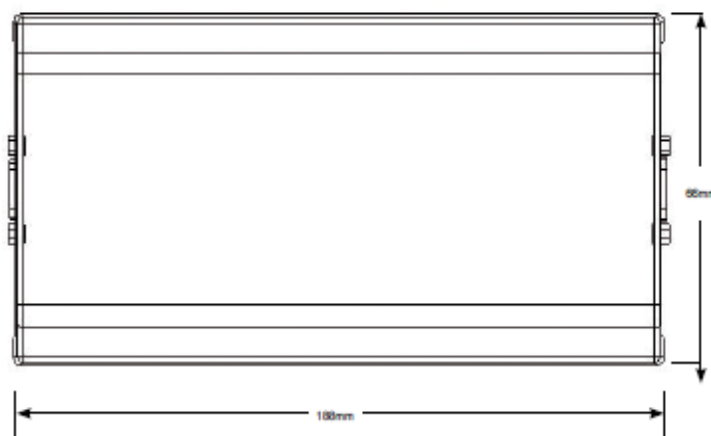

**Specifications**

Power Consumption:  
1.68 W (stable state i.e. no alarms and no fault conditions)  
Supply Voltage:  
24 VDC  
Current Consumption:  
70 mA  
Dimensions:  
192 mm x 110 mm x 40 mm  
(7.5 in x 4 in x 1.6 in approx.)  
Weight:  
0.4 kg (0.9 lbs)  
Supplied With:  
RS-232 9-way serial cable (male-female) for connection to a PC (identical to VSP-509).  
All internal product connectors for power & communications.  
Product Warranty 2 years

**Ordering Information**

Product	Part number
Sliding Windows HLI <i>(No modem capability)</i>	VHX-0200
Sliding Windows HLI <i>(With Dial In/Dial Out functionality)</i>	VHX-0210
Wall-mounted HLI <i>(Sliding Windows)</i>	VHX-1200
Open Protocol HLI <i>(Peer-to-Peer)</i>	VHX-0300
Open Protocol HLI <i>(Master-Slave)</i>	VHX-0310
Wall-mounted Open Protocol HLI <i>(Peer-to-Peer)</i>	VHX-1300
Wall-mounted Open Protocol HLI <i>(Master-Slave)</i>	VHX-1310
VESDA Socket Module <i>(Remote module box) (Not required with the Wall-mounted HLI)</i>	VRT-300
Xtralis VSC <i>(Xtralis VSC is available from the Xtralis Partner Extranet at www.dralis.com)</i>	VSW-100
VESDAlink 9-way serial cable <i>(Spare part)</i>	VSP-509